

Input data

System of measurement		Metric
Input type		Coupling for electric motor
Input speed	[rpm]	1400
Output speed	[rpm]	200
Ratio (i=)		7
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	4
Service factor		1.5
Rated Power P1	[kW]	6.16

Output data

Gear unit F RS 85 PC 7 112 B14 AC 32 B3

Type		RS - Worm speed reducers
Input type		F (Elastic coupling)
Size		85
Ratio (i=)		7
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	200
Rated output torque	[Nm]	168.08
Service Factor		1.5
Efficiency		0.88
Inertia moment	[kgm ²]	0.000489

Gear unit configuration

Output shaft	Hollow output shaft
Fixing	Shaft mounting
Version	PC

Output radial and axial loads





Ball bearings output radial load	[N]	3300
Taper bearings output radial load	[N]	4200
Ball bearings output axial load	[N]	660
Taper bearings output axial load	[N]	840

Accessories


Hollow output shaft	AC 32
---------------------	-------

Electric motor coupling

Size		112 A4
Poles n.		4
Power	[kW]	4

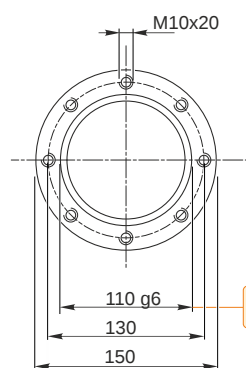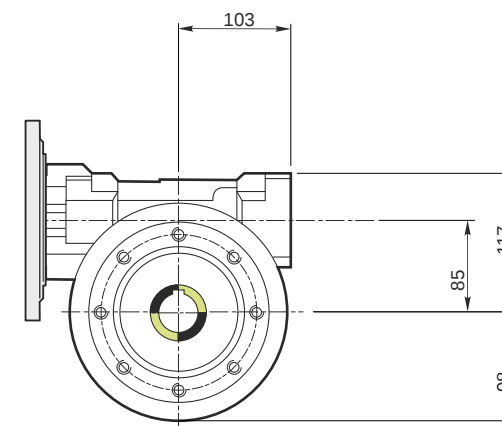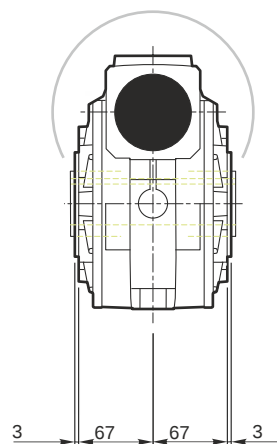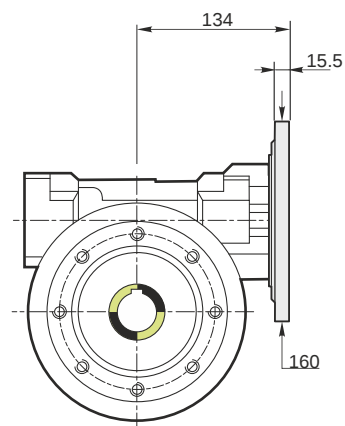






Hollow output shaft




109.988
109.966

32.025
32.000



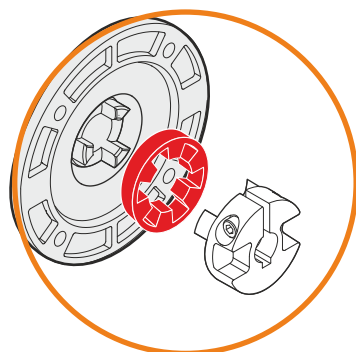


This gear unit is provided with an elastic coupling motor fitting

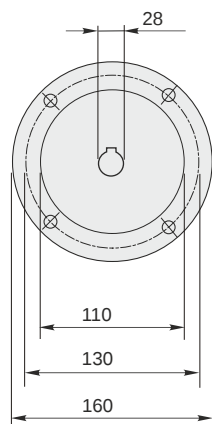


Mounting positions


B3




B6




B7




B8



V5



V6




0.6



← Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

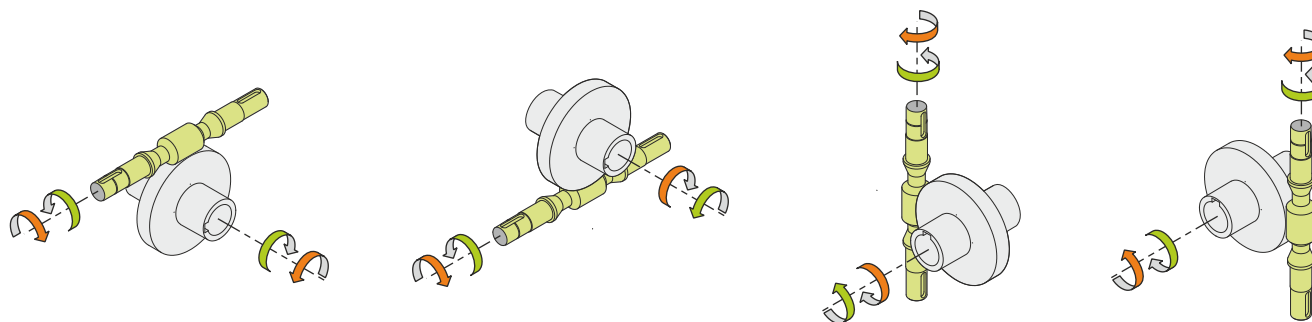

Weight

Gear unit [kg] 13.5

Gearing data

Axial module	4.7
Number of starts	4
Lead angle	26° 05'
Pressure angle	20°

Backdriving

Static back-driving
Quick back-driving
Dynamic back-driving