

### Input data

|                       |       |            |
|-----------------------|-------|------------|
| System of measurement |       | Metric     |
| Input type            |       | Gear motor |
| Input speed           | [rpm] | 1400       |
| Output speed          | [rpm] | 21.88      |
| Ratio (i=)            |       | 64         |
| Frequency             | [Hz]  | 50         |
| Input options         |       | IEC        |
| Requested input power | [kW]  | 0.75       |
| Service factor        |       | 1          |
| Rated Power P1        | [kW]  | 0.72       |

### Output data

|                  |                                                                 |
|------------------|-----------------------------------------------------------------|
| <b>Gear unit</b> | <b>M TA 80/60 B3 10 64 80 B14 AC 25 MT 0.75 kW 80 B4 B14 X3</b> |
|------------------|-----------------------------------------------------------------|

|                     |                     |                          |
|---------------------|---------------------|--------------------------|
| Type                |                     | TA - Worm speed reducers |
| Input type          |                     | M                        |
| Size                |                     | 80/60                    |
| Ratio (i=)          |                     | 64                       |
| Gearbox ratio       |                     | 10.00                    |
| Pre-stage ratio     |                     | 6.40                     |
| Input flange        |                     | B14                      |
| Input speed         | [rpm]               | 1400                     |
| Output speed        | [rpm]               | 21.88                    |
| Rated output torque | [Nm]                | 245.57                   |
| Service Factor      |                     | 1                        |
| Efficiency          |                     | 0.75                     |
| Inertia moment      | [kgm <sup>2</sup> ] | 0.000259                 |

#### Gear unit configuration

|                     |                     |
|---------------------|---------------------|
| Output shaft        | Hollow output shaft |
| Fixing              | Universal           |
| Version             | B3                  |
| Attachment position | 10                  |

#### Output radial and axial loads

|                                   |     |      |
|-----------------------------------|-----|------|
| Ball bearings output radial load  | [N] | 4800 |
| Taper bearings output radial load | [N] | 6400 |
| Ball bearings output axial load   | [N] | 960  |
| Taper bearings output axial load  | [N] | 1280 |

#### Accessories





|                     |       |
|---------------------|-------|
| Hollow output shaft | AC 25 |
|---------------------|-------|

### Electric motor


|       |      |       |
|-------|------|-------|
| Size  |      | 80 B4 |
| Poles |      | 4     |
| Power | [kW] | 0.75  |

#### Electric motor configuration

|                       |     |
|-----------------------|-----|
| Motor flange          | B14 |
| Terminal box position | X3  |

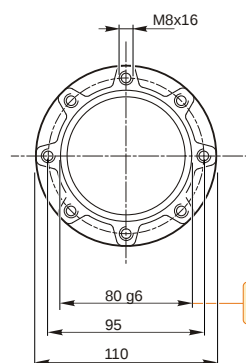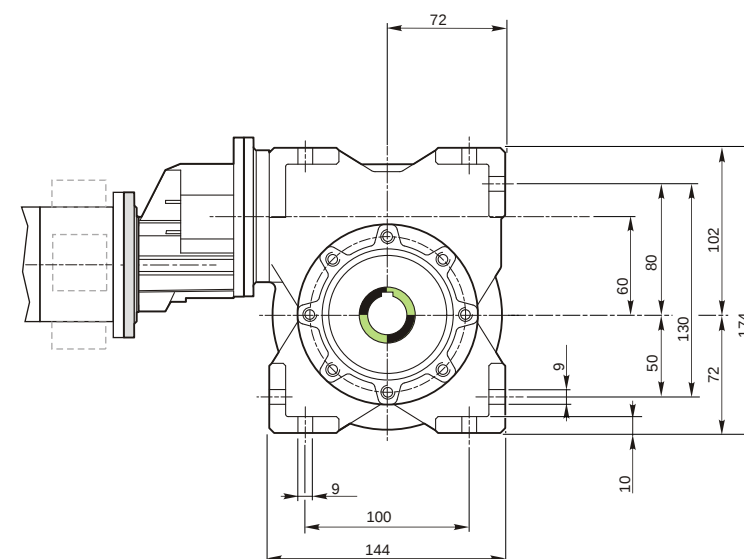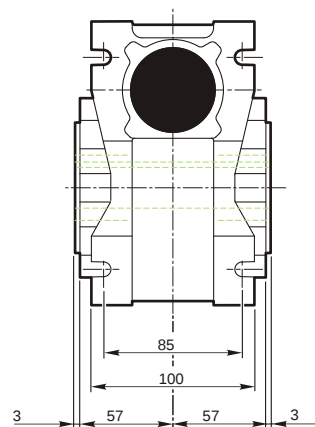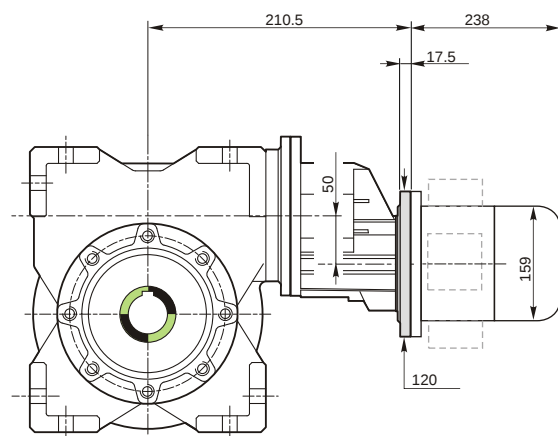


*Hollow output shaft*




79.99  
79.971

25.021  
25.000



**Attachment position**

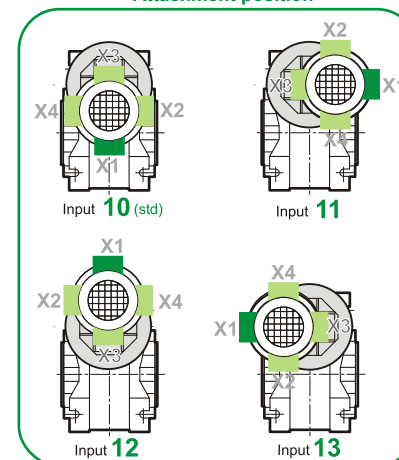

**M TA 80/60 B3 10 64 80 B14 AC 25 MT 0.75 kW 80 B4 B14 X3**

## Mounting positions

B3






B6

B7


B8

V5

V6



Terminal box position



0.1

1

2 1

0.23





2



← Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

## Direction of rotation

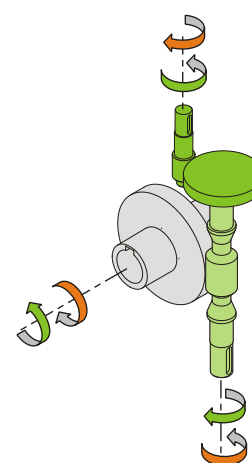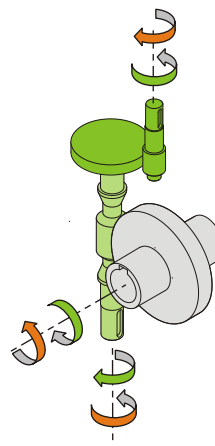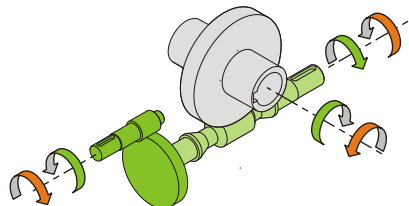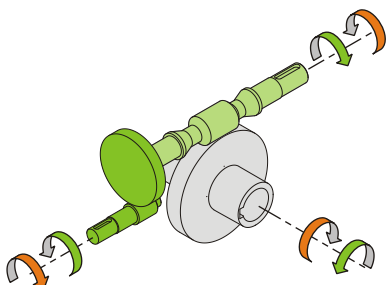

## Weight

|                     |      |
|---------------------|------|
| Gear unit [kg]      | 10.5 |
| Electric motor [kg] | 9.8  |

## Gearing data

|                  |        |
|------------------|--------|
| Axial module     | 3.1    |
| Number of starts | 3      |
| Lead angle       | 19 °0' |
| Pressure angle   | 20°    |

## Backdriving

Static back-driving  
Quick back-driving  
Dynamic back-driving

**M TA 80/60 B3 10 64 80 B14 AC 25 MT 0.75 kW 80 B4 B14 X3**