

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	35
Ratio (i=)		40
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	1.5
Service factor		1.1
Rated Power P1	[kW]	1.65

Output data

Gear unit	M RT 85 B3 40 90 B14 AC 35 MT 1.5 kW 90 L4 B14 X3
------------------	--

Type		RT - Worm speed reducers
Input type		M
Size		85
Ratio (i=)		40
Input flange		B14
Input speed	[rpm]	1400
Output speed	[rpm]	35
Rated output torque	[Nm]	294.69
Service Factor		1.1
Efficiency		0.72
Inertia moment	[kgm ²]	0.000344

Gear unit configuration

Output shaft		Hollow output shaft
Fixing		Universal
Version		B3

Output radial and axial loads

Ball bearings output radial load	[N]	5500
Taper bearings output radial load	[N]	7300
Ball bearings output axial load	[N]	1100
Taper bearings output axial load	[N]	1460

Accessories





Hollow output shaft		AC 35
---------------------	--	-------

Electric motor



Size		90 L4
Poles		4
Power	[kW]	1.5

Electric motor configuration


Motor flange		B14
Terminal box position		X3

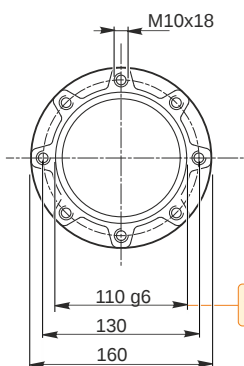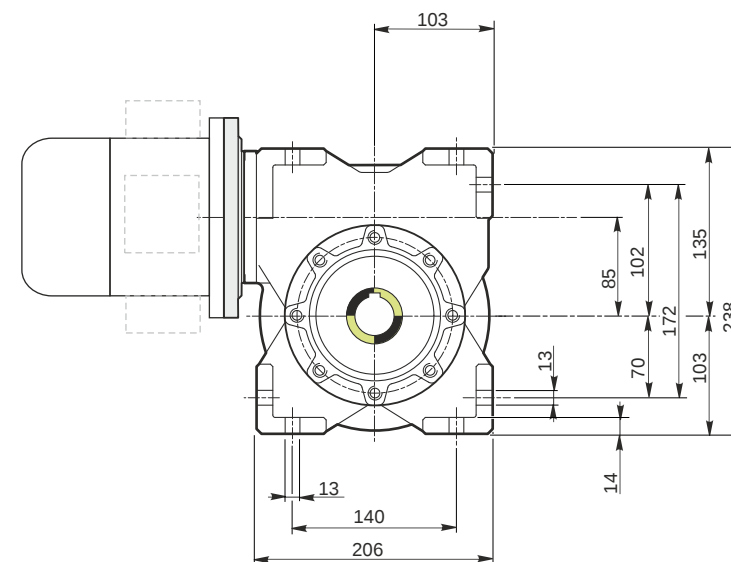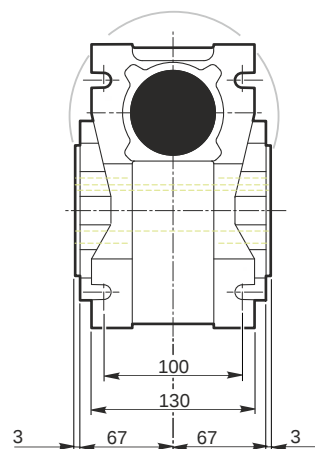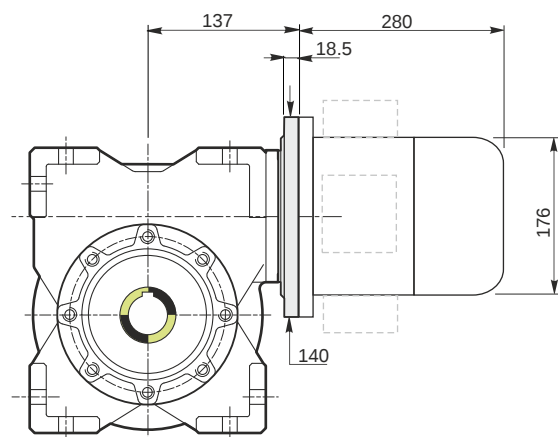

Hollow output shaft



Mounting positions

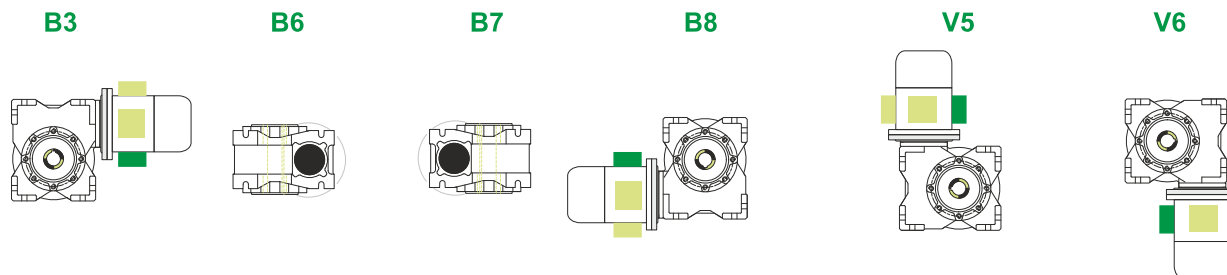

Terminal box position



0.6



Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

Gear unit [kg]	13.5
Electric motor [kg]	13.5

Gearing data

Axial module	3.4
Number of starts	1
Lead angle	5° 52'
Pressure angle	20°

Backdriving

Static self-locking
Slow back-driving in case of vibrations
Low dynamic back-driving