

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	140
Ratio (i=)		10
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	7.5
Service factor		1.2
Rated Power P1	[kW]	8.96

Output data

Gear unit	M RT 110 B3 10 132 B14 AC 42 MT 7.5 kW 132 M4 B14 X3
------------------	---

Type		RT - Worm speed reducers
Input type		M
Size		110
Ratio (i=)		10
Input flange		B14
Input speed	[rpm]	1400
Output speed	[rpm]	140
Rated output torque	[Nm]	445.1
Service Factor		1.2
Efficiency		0.87
Inertia moment	[kgm ²]	0.001942

Gear unit configuration

Output shaft		Hollow output shaft
Fixing		Universal
Version		B3

Output radial and axial loads

Ball bearings output radial load	[N]	4150
Taper bearings output radial load	[N]	5400
Ball bearings output axial load	[N]	830
Taper bearings output axial load	[N]	1080

Accessories





Hollow output shaft		AC 42
---------------------	--	-------

Electric motor



Size		132 M4
Poles		4
Power	[kW]	7.5

Electric motor configuration

Motor flange		B14
Terminal box position		X3

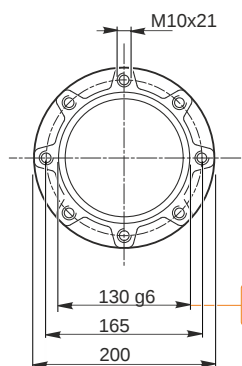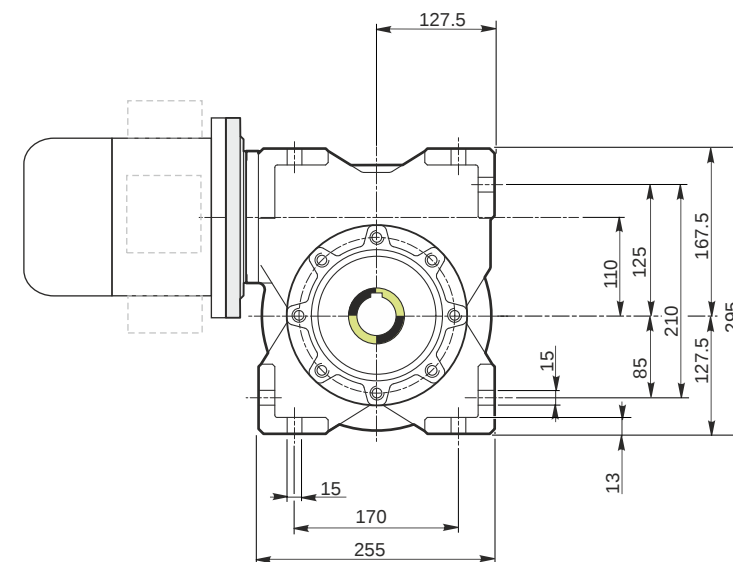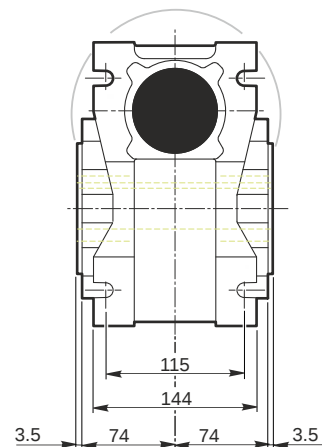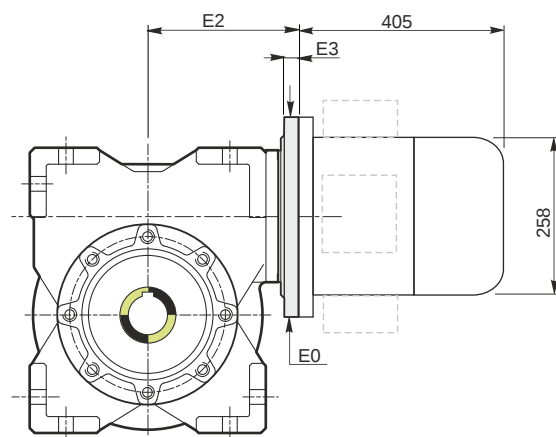


Hollow output shaft




Mounting positions


B3




B6




B7




B8




V5



V6



Terminal box position







1.5



Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

Gear unit [kg]	39
Electric motor [kg]	52

Gearing data

Axial module	5.8
Number of starts	3
Lead angle	20° 43'
Pressure angle	20°

Backdriving

Static back-driving
Quick back-driving
Dynamic back-driving