

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	0.89
Ratio (i=)		1568
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.13
Service factor		0.9
Rated Power P1	[kW]	0.12

Output data

Gear unit	M RT/RT 40/70 B3 21 1568 63 B14 AC 28 MT 0.13 kW 63 A4 B14 X3
------------------	--

Type		RT/RT - Worm speed reducers
Input type		M
Size		40/70
Ratio (i=)		1568
Gearbox ratio		28.00
Pre-stage ratio		56.00
Input flange		B14
Input speed	[rpm]	1400
Output speed	[rpm]	0.89
Rated output torque	[Nm]	417.14
Service Factor		0.9
Efficiency		0.3

Gear unit configuration

Output shaft		Hollow output shaft
Fixing		Universal
Version		B3
Attachment position		21

Output radial and axial loads

Ball bearings output radial load	[N]	6700
Taper bearings output radial load	[N]	7900
Ball bearings output axial load	[N]	1340
Taper bearings output axial load	[N]	1580

Accessories





Hollow output shaft		AC 28
---------------------	--	-------

Electric motor

Size		63 A4
Poles		4
Power	[kW]	0.13




Electric motor configuration

Motor flange		B14
Terminal box position		X3

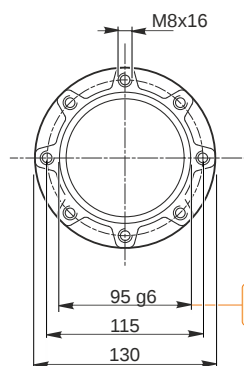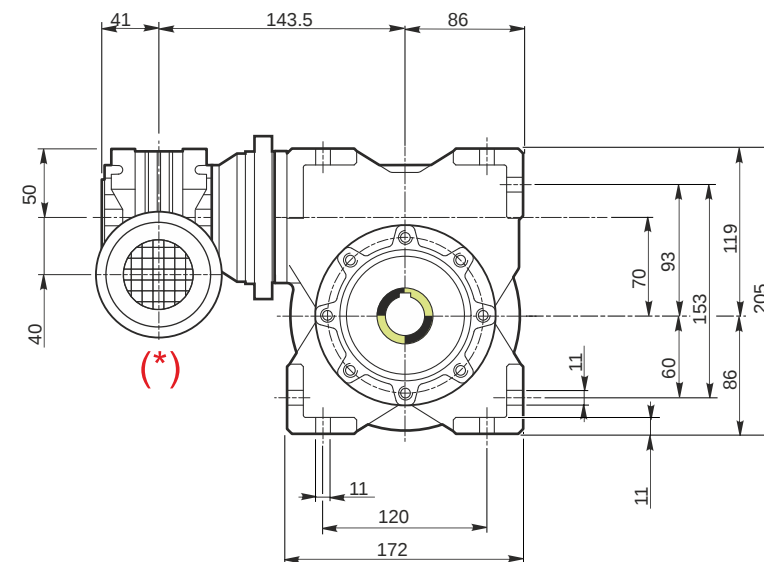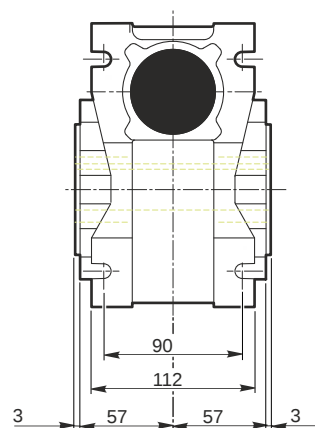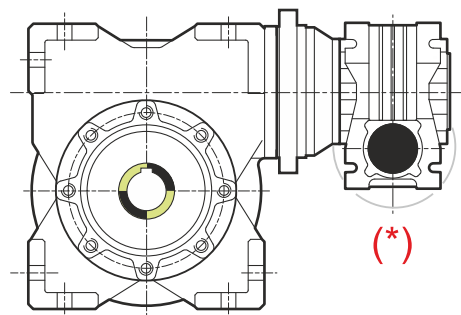

94.988
94.966

Hollow output shaft

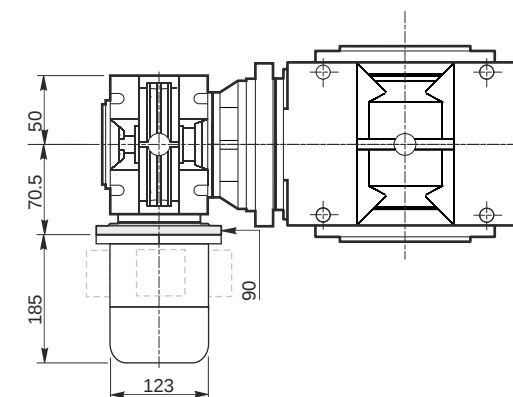

Mounting positions

B3






B6

B7

B8

V5

V6



Terminal box position



0.08

1

2

1

0.35

2



Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Attachment position

20

(std)

26

21














25

22


24

23

27



Direction of rotation

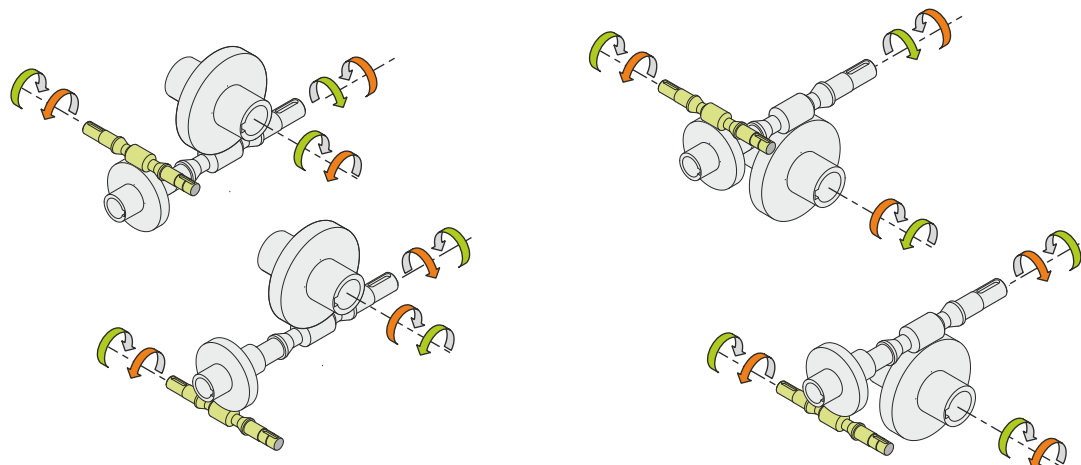

Weight

Gear unit [kg]	12
Electric motor [kg]	4.3

Gearing data

2	Axial module	3.9
	Number of starts	1
	Lead angle	7° 12'
	Pressure angle	20°

Backdriving

Static self-locking
Slow back-driving in case of vibrations
Low dynamic back-driving

M RT/RT 40/70 B3 21 1568 63 B14 AC 28 MT 0.13 kW 63 A4 B14 X3