

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	4.46
Ratio (i=)		313.6
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	0.25
Service factor		1
Rated Power P1	[kW]	0.25

Output data





Gear unit		M TA 71/70 B3 10 313.6 71 B14 AC 28 MT 0.25 kW 71 A4 B14 X3
Type		TA - Worm speed reducers
Input type		M
Size		71/70
Ratio (i=)		313.6
Gearbox ratio		49.00
Pre-stage ratio		6.40
Input flange		B14
Input speed	[rpm]	1400
Output speed	[rpm]	4.46
Rated output torque	[Nm]	267.4
Service Factor		1
Efficiency		0.5
Inertia moment	[kgm ²]	0.000051
Gear unit configuration		
Output shaft		Hollow output shaft
Fixing		Universal
Version		B3
Attachment position		10
Output radial and axial loads		
Ball bearings output radial load	[N]	6700
Taper bearings output radial load	[N]	7900
Ball bearings output axial load	[N]	1340
Taper bearings output axial load	[N]	1580
Accessories		
Hollow output shaft		AC 28

Electric motor


Size		71 A4
Poles		4
Power	[kW]	0.25

Electric motor configuration

Motor flange	B14
Terminal box position	X3

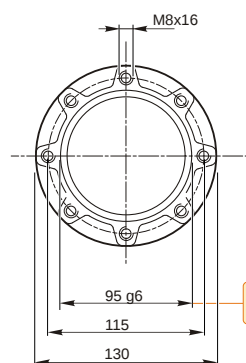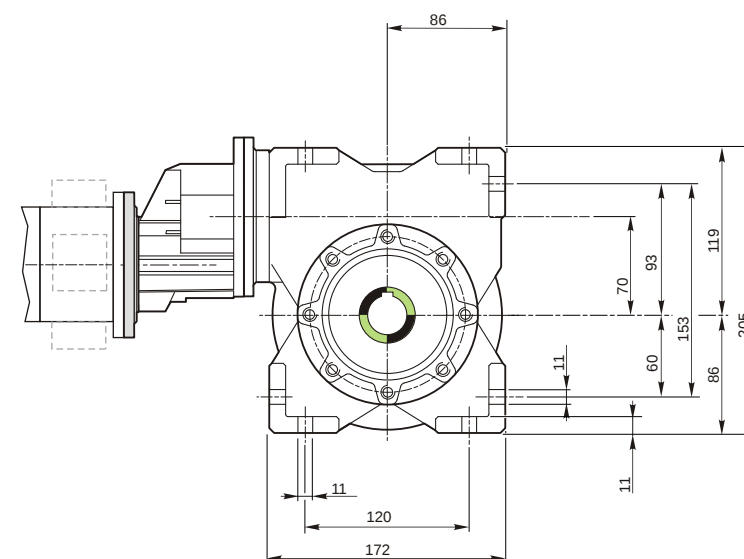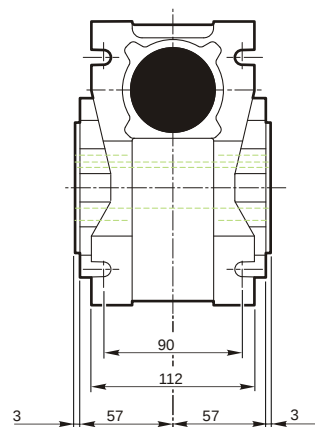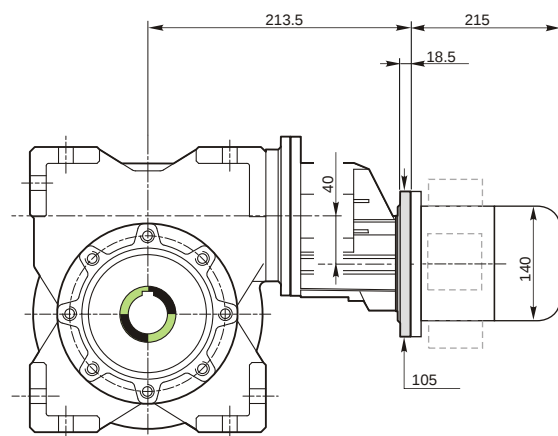


Hollow output shaft




94.988
94.966

28.021
28.000



Attachment position

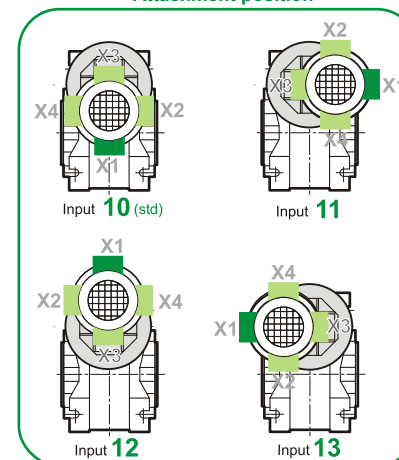

M TA 71/70 B3 10 313.6 71 B14 AC 28 MT 0.25 kW 71 A4 B14 X3

Mounting positions

B3






B6

B7


B8

V5

V6



Terminal box position



0.05

1







0.35

2

← Oil quantity [litres]

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation

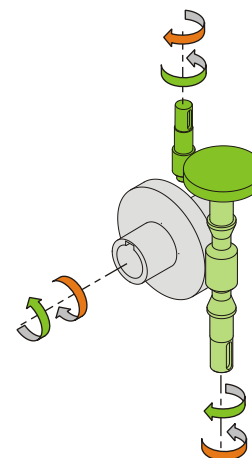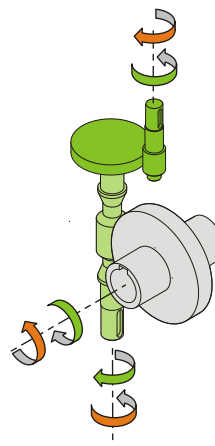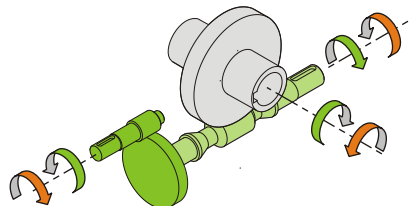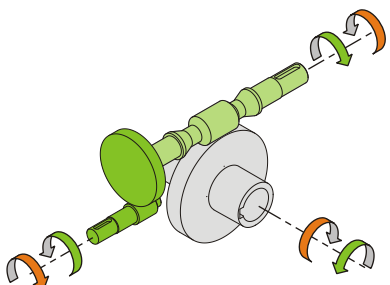

Weight

Gear unit [kg]	11.8
Electric motor [kg]	6.2

Gearing data

Axial module	2.3
Number of starts	1
Lead angle	4° 48'
Pressure angle	20°

Backdriving

Static self-locking
Slow back-driving in case of vibrations
Low dynamic back-driving

M TA 71/70 B3 10 313.6 71 B14 AC 28 MT 0.25 kW 71 A4 B14 X3